


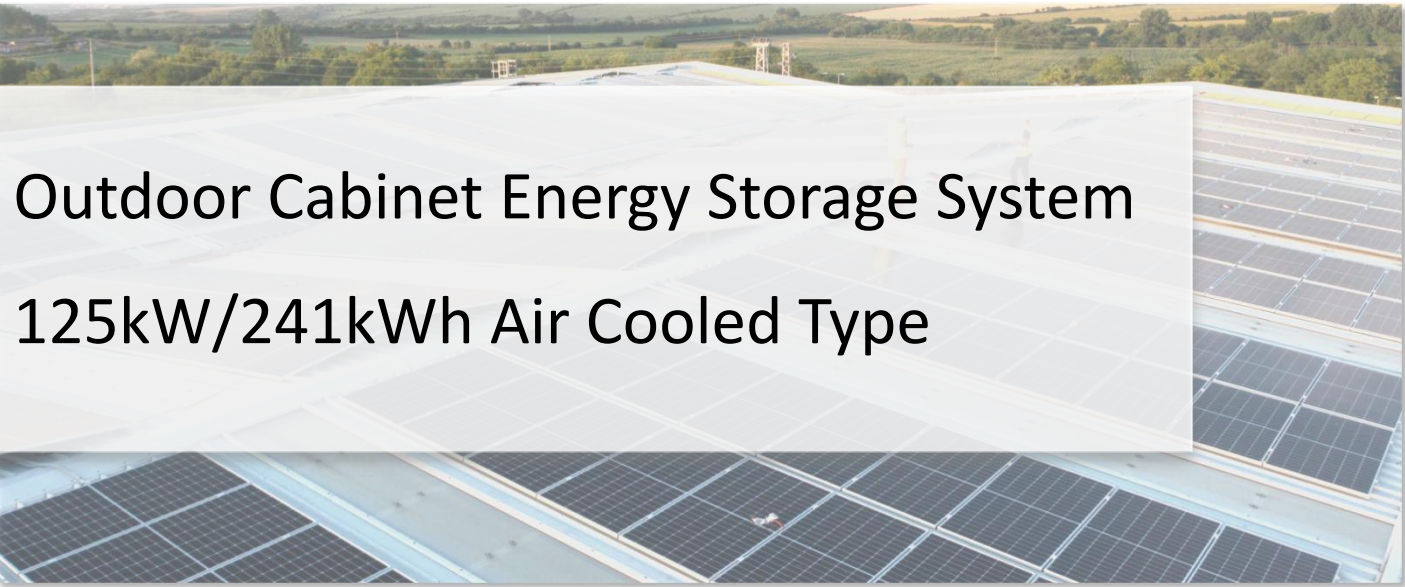

Outdoor Cabinet Energy Storage System

125kW/241kWh Air Cooled Type

HIGH CYCLE LIFE

Can achieve 6000 cycles at 90% state of charge, effectively reducing total cost of ownership.

HIGHLY ADAPTABLE

Strong environmental adapt ability, can withstand up to 60°C.

EASY TO STORE

Due to its extremely low self-discharge rate (LSD) and no risk of sulfation, it can last up to 6 months.

FAST CHARGING SPEED

High charge and discharge efficiency, reducing equipment downtime and saving more time.

MORE SECURE

Real-time monitoring of PDU for better system protection.

MORE PORTABLE

Lithium batteries provide more watt-hours per kilogram while weighing only one-third of their SLA equivalents.



Compatible with mainstream inverters: 125kW Deye/Growatt/Solis



PRODUCT PARAMETERS

Model	Hbowa-125kW/241kWh
Battery Parameter	
Battery rated capacity	241.15kWh
Battery rated voltage	768V (15 module series)
Battery voltage range	672V~864V
Battery type	Lithium Iron Phosphate battery (LFP)
Battery cell capacity	314Ah
Series of Battery	1P*16S*15S
Maximum charge and discharge current	157A
Inverter Parameter	
Inverter	Deye/Growatt/Solis
Grid type	Three-Phase four-Wire
Rated charging and discharging power (kw)	125kW
Rated grid voltage (V)	AC380
Rated current (A)	189A
Rated AC frequency	50/60Hz
Total distortion rate of current harmonics	< 3% (Rated power)
Power Factor	1(Ahead of schedule) ~1(Lag)
General Parameter	
Degree of protection	IP54
System efficiency	≥90%
Relative humidity	0 ~ 95% (no condensation)
Noise	≤75dB
Operating temperature range (°C)	-20~50°C
Cooling mode	Air cooling (refrigeration, ventilation, heating)
Fire protection system	Integrated
Altitude	<2000
Communication interface	RS485, CAN
Size (W * D * H)	1300*1260*2375mm
Weight (approx.)	2500kg (Without PCS)

※The manual is for reference only and is subject to actual communication.